


## PCE data sheet

|                        |   |
|------------------------|---|
| article#               | <b>25730-src</b>  |
| article description    | <b>Safety connector nat SH LED IP20 red series TopTaurus2</b>   |
| description long       | Safety connector series TopTaurus2<br>color: black-red, material: PA6 2-component rubberized<br>screwless quick lock system for housing cover and strain relief<br>LED voltage indicator<br>earthing system: Austrian/German with shutter<br>16A / 250V AC / 3p (2P+E), protection rating: IP20 |
| GTIN (EAN)             | 9003399487200   |
| country of origin      | AT  |
| customs number         | 85366990  |
| net weight             | 0.111 kg  |
| packaging quantity     | 10  |
| minimum order quantity | 10  |

|   |                             |
|---|-----------------------------|
| ETIM 7.0                                      | EC001327                    |
| Model   | Protective contact (SCHUKO) |
| Material                                      | Plastic                     |
| For heavy conditions (in accordance with VDE) | False                       |
| Degree of protection (IP)                     | IP20                        |
| Angle of plug                                 | Straight                    |
| Connection system                             | Schraubklemme               |
| Suitable for protective contact pin           | False                       |
| Colour  | Red                         |
| Number of poles                               | 3                           |
| Nominal voltage                               | 250 V                       |
| Nominal current                               | 16 A                        |

|                    |                       |
|--------------------|-----------------------|
| K (cable Ø)        | 6-14 mm               |
| SW                 | 21 mm                 |
| wire flexible      | 1-2,5 mm <sup>2</sup> |
| contact screws     | 80 Ncm                |
| strain relief      | 400 Ncm               |
| dismantling length | 30 mm                 |
| stripping length   | 7 mm                  |

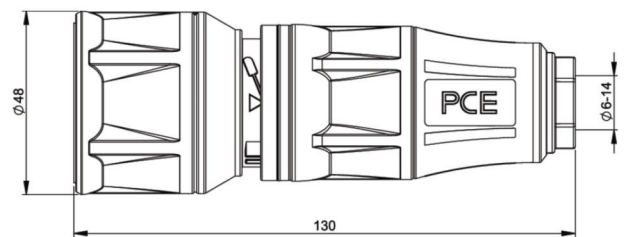

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)